



# Hazloc Heaters™

Safe heat when you need it!



**24VAC required  
For heating  
applications only**

**EX** SERIES  
**Caliber™**

# XET1-1-E-A

## Electronic Explosion-Proof Room Thermostat For Hazardous Locations

CE<sub>2813</sub> Ex II 2G Ex db IIB+H<sub>2</sub> T6 Gb (ATEX)

Ex db IIB+H<sub>2</sub> T6 Gb (IECEX)

Ex II 2G Ex db IIB+H<sub>2</sub> T6 Gb (UKEX)

-50°C ≤ T amb ≤ +40°C, IP66

(Gas Atmosphere Certified for ATEX / IECEX / UKEX Zone 1 and 2)

CE<sub>2813</sub> Ex II 2D Ex tb IIIC T85°C Db (ATEX)

Ex tb IIIC T85°C Db (IECEX)

Ex II 2D Ex tb IIIC T85°C Db (UKEX)

-50°C ≤ T amb ≤ +40°C, IP66

(Dust Atmosphere Certified for ATEX / IECEX / UKEX Zone 21 and 22)

# www.HazlocHeaters.com

For hazardous-location air temperature control rely on the **Hazloc Heaters™ XET1 ExCaliber™** series of electronic explosion-proof thermostats for the most dependable, accurate, robust and trouble-free service available.

**Features & benefits include:**

- Bolted, removable cover provides instant access for installation and servicing.
- Dial locking screw prevents unwanted adjustments.
- Aluminum and 304 stainless steel construction with no exposed copper or brass provides suitability for H<sub>2</sub>S environments.
- IP66 rating for moisture/dust protection.
- CFC & mercury free, no leveling required.
- Contact-free switching mechanism is not susceptible to wear.
- Fast-acting, accurate, reliable electronic temperature sensor, with protective shield, is unaffected by altitude.
- Completely sealed design is ideal for dusty environments.
- Vibration resistant design prevents set-point drift.
- Two (3/4" NPT) openings for easy field wiring (includes one 3/4" plug).
- Third party impact testing ensures durability.
- Non-orientation sensitivity allows for mounting in any position.
- Low profile design allows easy access in confined spaces.
- EMC compliance guarantees no nuisance tripping.


**Typical Applications:**

- Unit heaters & convection heaters

**Protection Method:**

- ATEX/IECEX/UKEX:
  - General requirements IEC/EN 60079-0
  - Flameproof IEC/EN 60079-1
  - Dust ignition proof IEC/EN 60079-31
- Ingress protection: IEC 60529

The **XET1** electronic thermostat is also available as a built-in option on all sizes of **Hazloc Heaters™ AEU1** explosion-proof electric air heaters.



Dial locking screw



**Specifications: (heating applications only)**


Temperature adjustment range: 5°C to 25°C (40°F to 80°F)  
 Temperature differential: +/- 1°C from set point  
 Operating limits: -50°C ≤ T amb ≤ +40°C  
 Storage limits: -50°C to +60°C  
 Switching: Electronic  
 Field wiring openings: Two 3/4" NPT (includes one 3/4" plug)  
 IP rating: IP66  
 Net weight: 2.0 Kg  
 Ship weight: 2.1 Kg  
 Shipping dimensions: 12.7 cm x 12.7 cm x 17.8 cm

**Electrical rating:**


24VAC 50/60Hz; 1 Amp max continuous

**Model: XET1-1-E-A**

**Wiring diagram:  
24VAC required**

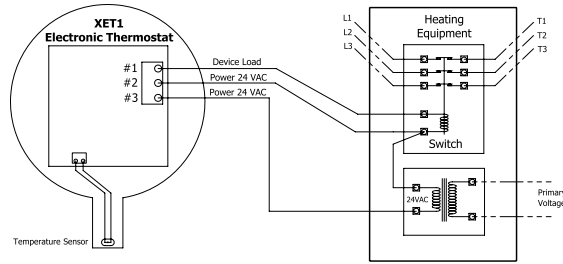

**Physical dimensions:**

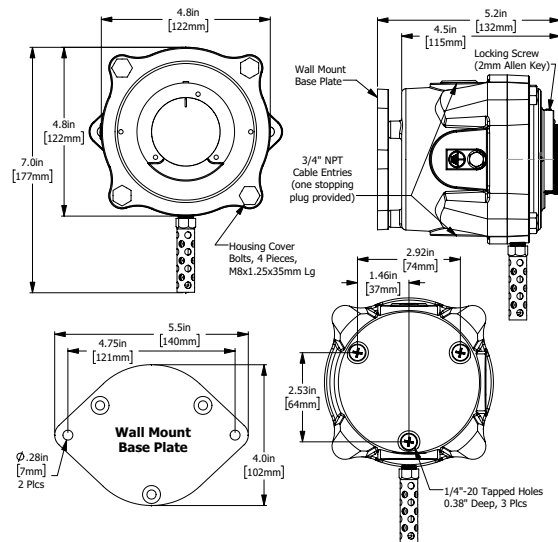

**Limited 36-Month Warranty**

**Hazloc Heaters™** warrants all **XET1 ExCaliber™** series of electronic explosion-proof thermostats against defects in materials and workmanship under normal conditions of use for a period of thirty-six (36) months from date of purchase based on the following terms:

1. The thermostat must not be modified in any way.
2. The thermostat must be stored, installed and used only in accordance with the owner's manual and attached data plate information.
3. The complete thermostat may be returned to our manufacturing plant for repair or replacement (at our discretion), freight charges prepaid.
4. Contamination by dirt, dust, etc. or corrosion will not be considered as defects.
5. This warranty shall be limited to the actual equipment involved and, under no circumstances, shall include or extend to installation or removal costs, or to consequential damages or losses.



#1, 666 Goddard Ave. NE  
 Calgary, Alberta T2K 5X3 Canada  
 Tel.: +1-403-730-2488  
 Fax: +1-403-730-2482  
 Customer Toll Free (U.S. & Canada):  
 +1-866-701-Heat (4328)  
 www.HazlocHeaters.com

Hazloc Heaters is a trademark of Hazloc Heaters Inc.  
 The information contained in this brochure has been carefully checked and verified for accuracy. Specifications subject to change without notice.

PRINTED IN CANADA  
 © Copyright 2024  
 Cat No. XET1-E-202400-6